

True Presence

COM2 - concealed white
 EAN 4007841 057947
 Article number 057947



Hochfrequenz
Sensor 360°



Bewegung Ø 15 m



Präsenz Ø 15 m



True Presence Ø 9
m



Helligkeit

2000 W

2000 W Max. (LED-
fähig)



2 - 12 m



2 - 2000 Lux



20 Sek - 60 Min



IP20

Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m² – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation. Easy to control via app and Bluetooth.

Technical specifications

Dimensions (L x W x H)	50 x 103 x 103 mm	LED lamps > 8 W	600 W
With motion detector	Yes	Capacitive load in µF	176 µF
Manufacturer's Warranty	5 years	Power consumption	1 W
Settings via	Bluetooth	Technology, sensors	High frequency, Light sensor
With remote control	No	Mounting height	2,00 – 12,00 m
Version	COM2 - concealed white	Mounting height max.	12,00 m
PU1, EAN	4007841057947	Optimum mounting height	2,8 m
Type	Presence detector	Montagehöhe max. True Presence Erfassung	4,00 m
Application, place	Indoors	HF-system	7,2 GHz
	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors	Detection	also through glass, wood and stud walls
Application, room		Detection angle	360 °
		Angle of aperture	160 °
		Sneak-by guard	Yes
		Capability of masking out individual segments	No

True Presence

COM2 - concealed white
 EAN 4007841 057947
 Article number 057947



Technical specifications


Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Switching output 2, resistive	230 W
Switching output 2, floating	Yes
Fluorescent lamps, electronic ballast	1500 W
Fluorescent lamps, uncorrected	1000 VA
Fluorescent lamps, series-corrected	400 VA
Fluorescent lamps, parallel-corrected	1000 VA
Switching output 1, low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W

Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 15 m (177 m ²)
Reach, tangential	Ø 15 m (177 m ²)
Reach, presence	Ø 15 m (177 m ²)
True Presence reach	Ø 9 m (64 m ²)
Transmitter power	< 1 mW
Functions	Group parameterisation, Semi-/fully automatic, Lighting scenario, Manual ON / ON-OFF, Neighbouring group function, Normal / test mode
Twilight setting	2 – 2000 lx
Time setting	20 s – 60 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth

True Presence


COM2 - concealed white
EAN 4007841 057947
Article number 057947

Detection Zone

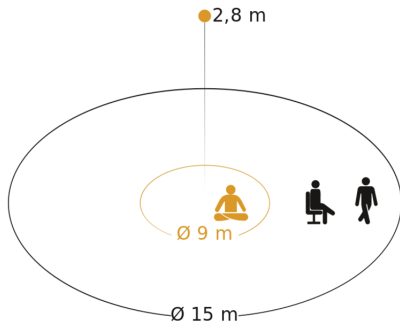

Possible mounting height: 2,00 m - 12,00 m
Orange: True Presence
Black: movement and presence

Dimension Drawing

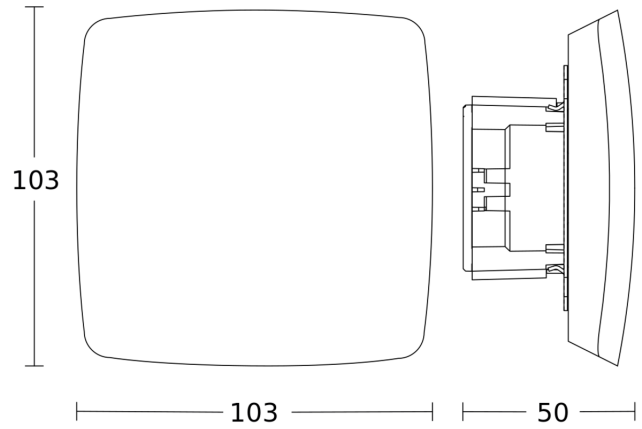

Master circuit diagram

