

Presence detector - Professional Line

IR Quattro HD

LiveLink

EAN 4007841 009717



infrared sensor
360°



max. 8m x 8m
presence

HD

4800 zones



ideal 2,5 - 10 m



indoor sensor

iQ

iQ-mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

Herstellergarantie

manufacturer's
warranty
steinel-professional.de/garantie

CE

CE

Function description

Detection no finer! Infrared presence detector Presence Control PRO IR Quattro HD LiveLink for indoors, ideal for medium to large-size offices, conference and meeting rooms, classrooms and lecture theatres, sports halls and warehouses, installation height up to 10 m, for integration into the LiveLink system, 4800 switching zones for the ultimate in detection quality, presence detection over a true 64 m², square detection zone, mechanically scalable.

IR Quattro HD

LiveLink
EAN 4007841 009717



Technical specifications

| | |
|---|---|
| Type | Presence detector |
| Dimensions (L x W x H) | 50 x 120 x 120 mm |
| Power supply, detail | DALI bus |
| Number of Dali users | 3 |
| Sensor Technology | passive infrared |
| Application, place | Indoors |
| Application, place, room | classroom, lecture hall, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, sports hall, reception / lobby, multi-storey / underground car park, Indoors |
| Installation site | ceiling |
| Installation | Concealed wiring |
| Switching zones | 4800 switching zones |
| Electronic scalability | No |
| Mechanical scalability | Yes |
| Mounting height | 2,50 – 10,00 m |
| Optimum mounting height | 2,8 m |
| Detection angle | 360 ° |
| Angle of aperture | 160 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | No |

| | |
|----------------------------|---------------------------------|
| Reach, radial | 8 x 8 m (64 m ²) |
| Reach, tangential | 20 x 20 m (400 m ²) |
| Reach, presence | 8 x 8 m (64 m ²) |
| Twilight setting TEACH | Yes |
| Time setting | 30 s – 60 Min. |
| LiveLink values | Light level, Motion detection |
| Basic light level function | No |
| With bus coupling | Yes |
| Settings via | LiveLink app |
| With remote control | No |
| IP-rating | IP20 |
| Material | Plastic |
| Colour | white |
| Colour, RAL | 9010 |
| Manufacturer's Warranty | 5 years |
| Version | LiveLink |
| PU1, EAN | 4007841009717 |

Accessories


| | |
|--------------------|-----------------------------|
| EAN 4007841 003036 | Control PRO guard cage |
| EAN 4007841 009151 | Remote control Smart Remote |

IR Quattro HD

LiveLink

EAN 4007841 009717

Detection Zone

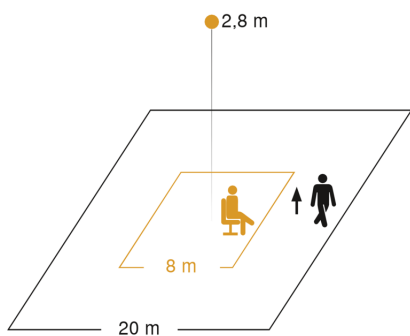

Mögliche Montagehöhe: 2,50 m – 10,00 m

Orange: Präsenz

Schwarz: tangential

Dimension Drawing

